



AMBERLITE™ IRA96 Resin

Macroporous Weak Base Anion Exchange Resins for Industrial Water treatment

Description

AMBERLITE™ IRA96 Resin is a macroporous weak base anion resin with superior mechanical stability and high porosity to allow efficient adsorption of large organic molecules. The resin is primarily intended for the removal of strong acids from water following a strong acid cation resin and provides excellent protection against organic fouling for the strong base anion exchange resin placed downstream in a deionization plant. AMBERLITE IRA96 Resin is also available in a special SB particle size grade to give optimum performance in stratified bed applications combined with AMBERJET™ 4300 Cl, AMBERLITE IRA458RF Cl or DOWEX™ MARATHON™ A LB strong base anion resins.

Typical Physical and Chemical Properties

Physical form	White to amber opaque spherical beads
Matrix	Styrene divinylbenzene copolymer
Ionic form as shipped	Free Base (FB)
Total exchange capacity	1.25 eq/L (27.3 kgr/ft)
Moisture retention capacity	59-65%
Shipping weight	670 g/L (42 lbs/ft)
Particle size	AMBERLITE IRA96
Uniformity coefficient max.	1.8
Harmonic mean size	0.55–0.75 mm
< 0.300 mm max.	1%
Reversible swelling	FB to Cl ⁻ 15%

Suggested Operating Conditions

Maximum operating temperature	100°C / 212°F		
Minimum bed depth	700 mm (2.3 ft)		
Service flow rate	5–40 BV [*] /h (0.6–5.0 gpm/ft ³)		
Regenerant	NaOH	NH ₃	Na ₂ CO ₃
Level (% of ionic load)	120	150	200
Concentration	2–4%	2–6%	5–8%
Minimum contact time	30 minutes		
Slow rinse	2 BV at regeneration flow rate		
Fast rinse	4–8 BV at service flow rate		

*1 BV (Bed Volume) = 1 m³ solution per m³ resin or 7.5 gals per ft³ resin


Packaging

25 liter bags or 7 cubic foot drum

Hydraulic Characteristics

Figure 1 shows the bed expansion of AMBERLITE™ IRA96 Resin as a function of backwash flow rate and water temperature. Figure 2 shows the pressure drop data for AMBERLITE IRA96 Resin as a function of service flow rate and water temperature. These data are valid for water treatment and have to be corrected according to the solution to be treated.

Figure 1. AMBERLITE IRA96 Resin Backwash Expansion Data

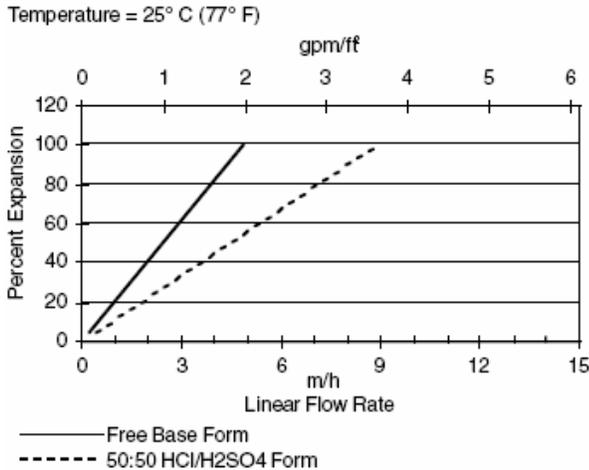


For other temperatures use:

$$F_T = F_{77°F} [1 + 0.008 (T_{°F} - 77)], \text{ where } F \equiv \text{gpm/ft}^2$$

$$F_T = F_{25°C} [1 + 0.008 (1.8T_{°C} - 45)], \text{ where } F \equiv \text{m/h}$$

Figure 2. AMBERLITE IRA96 Resin Pressure Drop Data

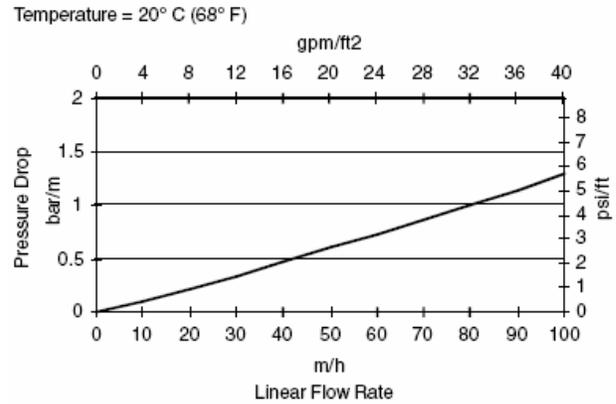

For other temperatures use:

$$P_T = P_{20°C} / (0.026 T_{°C} + 0.48), \text{ where } P \equiv \text{bar/m}$$

$$P_T = P_{68°F} / (0.014 T_{°F} + 0.05), \text{ where } P \equiv \text{psi/ft}$$

Product Stewardship

Dow has a fundamental concern for all who make, distribute, and use its products, and for the environment in which we live. This concern is the basis for our product stewardship philosophy by which we assess the safety, health, and environmental information on our products and then take appropriate steps to protect employee and public health and our environment. The success of our product stewardship program rests with each and every individual involved with Dow products - from the initial concept and research, to manufacture, use, sale, disposal, and recycle of each product.

Customer Notice

Dow strongly encourages its customers to review both their manufacturing processes and their applications of Dow products from the standpoint of human health and environmental quality to ensure that Dow products are not used in ways for which they are not intended or tested. Dow personnel are available to answer your questions and to provide reasonable technical support. Dow product literature, including safety data sheets, should be consulted prior to use of Dow products. Current safety data sheets are available from Dow.

DOW™ Ion Exchange Resins

For more information about DOW™ resins, call the Dow Water & Process Solutions business:

North America: 1-800-447-4369
 Latin America: (+55) 11-5188-9222
 Europe: 800 3 694 6367
 Pacific: =800 7776 7776
 China: =400 889 0789
 Italy: 800-783-825
 South Africa: 0800 99 5078
<http://www.dowwaterandprocess.com>

Warning: Oxidizing agents such as nitric acid attack organic ion exchange resins under certain conditions. This could lead to anything from slight resin degradation to a violent exothermic reaction (explosion). Before using strong oxidizing agents, consult sources knowledgeable in handling such materials.

NOTICE: No freedom from infringement of any patent owned by Dow or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other government enactments. The product shown in this literature may not be available for sale and/or available in all geographies where Dow is represented. The claims made may not have been approved for use in all countries. Dow assumes no obligation or liability for the information in this document. References to "Dow" or the "Company" mean the Dow legal entity selling the products to Customer unless otherwise expressly noted. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED.



UNRESTRICTED – May be shared with anyone
 ©TM Trademark of The Dow Chemical Company ("Dow") or an affiliated company of Dow
 AMBERLITE™ IRA96 Resin / Dow Water & Process Solutions

177-02205-0312
 03/2012, Rev.1